
XV-017716 Routes to Keep the Ground

Exploration licence XV-017716,
Biger soum, Govi-Altai

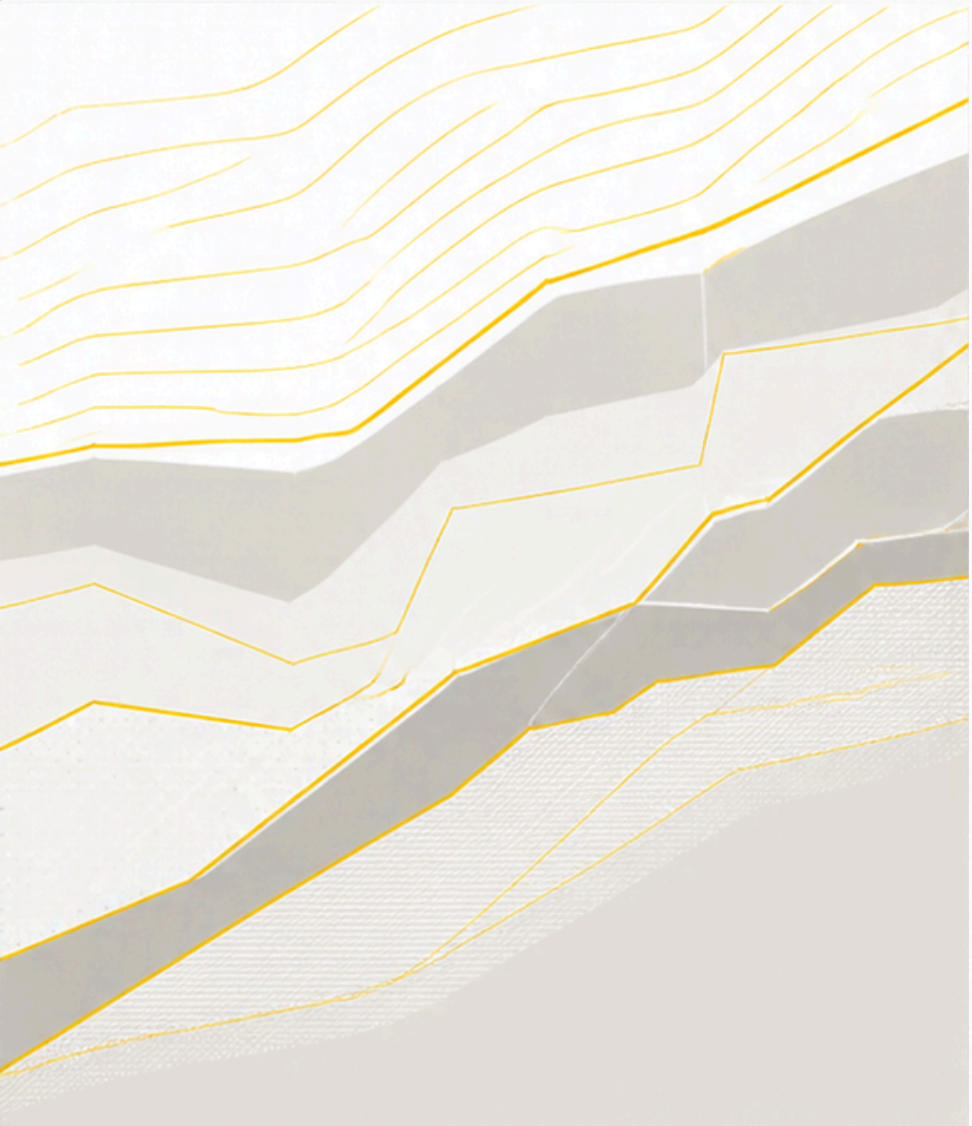

Prepared for
NCGT LLC

by
Great Vision LLC

2 November 2026

Summary

44 holes
1,728.5 m drilled in 2025 and 2026

38 m of 620 m
2026 drilling with results

₮593M–₮657M
likely cost to a filing on Phase 1

About 16 weeks
to filing, then up to 120 days of review

We recommend one route now: file a gold reserve report before the licence expires, then seek a mining licence or a pre-mining agreement. It is tight, and we cannot promise that MRAM will accept the result.

- **Extension:** MRAM's advice looks correct. A licence first granted in 2015 appears to have reached the 12-year legal limit.
- **Mining licence:** you are right that the drilling is not enough yet. Only 38 m of the 620 m drilled in 2026 has results, and no hole is logged as reaching bedrock.
- **Line direction:** still open. The attached plan's azimuth 135° lines may run along the gold corridor rather than across it. We propose a test fence before the grid is fixed.
- **Quarry licence:** it can hold up to 400 ha per licence, for construction minerals only. It gives no right to the gold, so it is a fallback.
- **Likely cost:** about ₮593M to ₮657M to reach a filing on 46 new holes. These are planning figures, not quotes.
- **Likely time:** about 16 weeks to filing, starting with a rig in mid-November, then up to 120 days of review.

Two things are needed from NCGT. By 6 November, the licence certificate, because the 2024 report form and the 2019 plan both give a 29 May 2015 grant date, which implies a May 2027 limit rather than March. By 13 November, a decision on winter drilling, after MRAM has been asked whether a filing protects the ground during review.

What the package shows

The drilling shows gold in many holes, strongest in two clusters in the middle of the licence, but not yet enough to define a reserve. Figures below come from the logs and CSV files in the October 2026 package.


Item	Finding
Licence	XV-017716 "Khuurai", Biger soum, Govi-Altai. 2,793.91 ha per the 2017 work report
2025 drilling	19 holes, 1,108.5 m, 20 May to 21 June 2025. Coordinates place all 19 inside XV-017716 and none in MV-020665
2025 gold	Highest single sample 212 mg/m³ (ZKA10-2). Eight of the 13 ZKB holes returned nothing above 10 mg/m³
2026 drilling	25 UKS holes, 620 m. Holes stop at 6 to 30 m
2026 gold	Gold in 17 holes, down to 28.8 m. Highest single sample 379 mg/m³ over 0.4 m (GP-26015)
Best 2026 areas	Around GP-26007, 26015 and 26022, and around GP-26012, 26018 and 26021
Sampling gap	Only 95 samples (38 m of 620 m) have results. Six holes have none
Base of the gravels	The logs use only gravel and clay codes. No hole is logged as reaching bedrock

The 2026 holes are not on a regular grid, and the two best clusters are 480 m apart with no holes between them. Gold also occurs outside them: 106.9 mg/m³ in GP-26011, 91.6 in GP-26004, 53.8 in GP-26014 and 49.1 in GP-26008. The south of the licence is undrilled: the southernmost hole is at N 5084169, and the licence corners reach N 5081209. Thickness, average grade and continuity therefore cannot be calculated yet.

Drilling to date

44 holes and 1,728.5 m have been drilled. This is the position in the latest package files (2026 collars 23 October, assays 29 October). The 2026 contractor's final report has not been issued, and we have no drilling data after those dates.

Year	Holes	Metres	Samples with a numeric result	Holes with gold	Highest sample, mg/m³
2025	19	1,108.5	1,544 (1,482 in ZKB, mostly below 10; 62 in ZKA)	11	212 (ZKA10-2)
2026	25	620.0	95 (38 m)	17	379 (GP-26015)
Total	**44**	**1,728.5**	**1,639**	**28**	

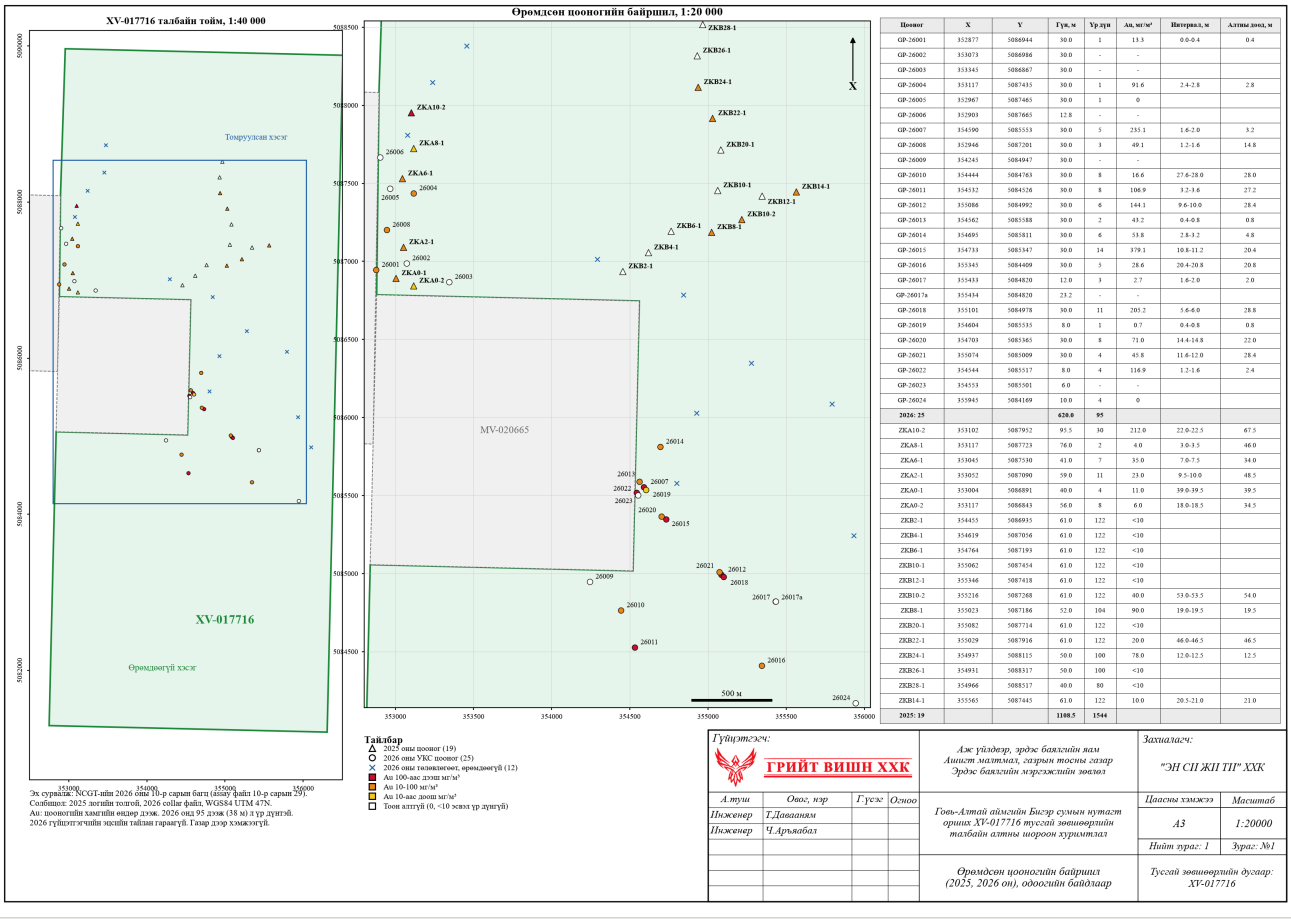

- **Against the 2026 plan:** 17 of the 29 planned positions have a hole within 30 m, and 12 were not drilled (GP2026007 at high priority, 11 at low priority). Plan numbers do not match actual numbers: GP2026018, for example, was drilled as GP-26024.
- **Not on the plan:** GP-26007, 26019, 26022 and 26023 are more than 30 m from any planned position. GP-26017, 26018, 26020 and 26021 are within 30 m of a position already counted.
- **Seven holes stopped short of 30 m:** GP-26006 (12.8 m), 26017 (12 m), 26017a (23.2 m), 26019 (8 m), 26022 (8 m), 26023 (6 m) and 26024 (10 m).
- **Depth:** the 2025 holes reached up to 95.5 m, with gold down to 67.5 m in ZKA10-2, 54 m in ZKB10-2 and 48.5 m in ZKA2-1. These lie north of the two best 2026 clusters.
- **Not covered:** no hole lies south of N 5084169.

The appendix lists every hole. Coordinates are attached in Excel, and the map as a stamped PDF.

Can a report be filed on the current drilling?

No. The law does not bar filing, but none of the six requirements for the lowest reserve category, C, is fully met. The current data fits at most a P1 assessment. P1 is a resource, not a reserve, so it does not open routes 1 or 2.

Clause (Minister's Order 203)	Requirement	Current position	Result
3.2.3.1	Form, size and setting of the body essentially defined	No bedrock logged, the base of the gold is not closed, and the direction of the body is unknown	Not met
3.2.3.2	Variation and continuity of grade and thickness studied in space	38 m of the 620 m drilled in 2026 (6.1%) has results, 0 to 20% per hole, and six holes have none	Not met
3.2.3.3	Natural and technological types defined	Not in the package	Not met
3.2.3.4	Processing established from a few samples or by analogy with a similar deposit	No tests. Analogy is allowed, so this is the easiest gap to close	Not yet done
3.2.3.5	Useful and harmful components studied in advance	Not in the package	Not met
3.2.3.6	Limits set by drilling against conditions	No conditions set, and no sections that bound a block	Not met

The longest continuous sampled interval with gold is 2 m (GP-26007, 1.2 to 3.2 m). The GP-26012, 26018 and 26021 cluster is three holes within 41 m, and their peaks sit at different depths: 9.2 to 10.8 m, 5.6 to 6.0 m and 11.6 to 12.0 m. We found no QA/QC records or hydrogeological study in the package.

The first step is to confirm whether the 582 m without results was sampled. Results would improve the position on 3.2.3.2, but the hole layout would remain the problem. Order 203 sets no grid specific to placers, so this is our reading and not an expert's opinion.

What the rest of the package adds

A full review of the magnetic surveys, the RSC mapping, the 54 photographs and the CAD files raised these points. Most are items to check, not conclusions.

Finding	Source	Action
The 2024 report form gives a grant date of 29 May 2015, with 2024 as year 10. Nothing in the package supports March 2027, and it holds no certificate or extension record	IMG_5984	The 12-year limit is probably 29 May 2027. Confirm from the certificate
Soum governor's letter No. 253 of 24 September 2024 describes XV-017716 as holding a mining licence. A 2018 plan is titled "exploration and mining", and ECOS LLC prepared a 2019 tailings design for a "Khuurai" open pit	Photographs, including IMG_5970 and 5983	Confirm that no mining licence or registered deposit exists. If one does, the routes change
2022 MNNC work: 18 pits, 101 samples, particle counts only. 2024 Zhengyuan work: 29.94 km² of mapping, 2,679 m³ of trenching, 178 gold, 438 heavy-mineral and 5,294 rock-chip samples. The CAD shows 57 pits and 9 trenches. The results are not in the package	IMG_5965 to 5966, 5985, CAD	Please send results and costs. They could support the report
The 2024 report form shows 1,839 m³, while the work record shows 2,679 m³, a gap of about 840 m³	Form, IMG_5985	Reconcile before reporting
Gold in the middle of the licence may follow a north-west to south-east fault corridor	RSC, Monrock, Galaxy	See "The line direction is still open" in the programme section

Finding	Source	Action
There are no strength, grading or volume tests on sand, gravel or hard rock	Whole package	See the quarry section
The CAD legend shows a local water protection zone. Two long lines cross the licence, passing 22 to 26 m from ZKB24-1 and ZKB22-1. They may be its limits, which is unconfirmed	2025_fact.dwg	Please send the zone limits. They would constrain mine and quarry areas
CAD and log positions differ: ZKA0-1 and ZKA0-2 appear swapped (about 120 m), ZKA6-1 by 74 m, ZKB14-1 by 23.6 m, ZKA10-2 by 22.6 m, ZKB12-1 by 15.3 m. The CAD also has extra boundaries of 29.94 and 20.20 km², against a 27.94 km² licence	Two DWG files, 2025 logs	Resurvey before reporting
Inspector lines are blank on the 2023 and 2024 plan and report covers. A handwritten receipt on the 2024 report appears to read 15 April 2026. The mineral type varies between documents	IMG_5932 to 5934, 5973, 5980, 5981	Please send approved copies. A lawyer should check any effect on an application
The Galaxy report carries another licence's headers (MV-020609, "Tseel", FVSP LLC), and Monrock MX page 21 duplicates page 5. Monrock's survey stops near N 5083270 and omits the south and north-east	Magnetic survey reports	Obtain corrected copies, and do not rely on these for the unsurveyed ground

Routes compared

Only a reserve filing on the gold can hold the gold rights. A quarry licence can hold part of the ground, but only for construction minerals.

Route	What it would hold	Legal basis	Main obstacle	Our view
1. Gold reserve report, then mining licence	Gold, on any part of the licence area	Minerals Law 21.1.3, 24.1, 25.1, 48.3	Report must be accepted first. Winter drilling and a very short programme	**Recommended, with route 2**
2. Gold reserve report, then pre-mining agreement	Time to start mining, up to 3 years after exploration expiry	Minerals Law 23.1 to 23.4	Reserves must be registered first	**Recommended, with route 1**
3. Quarry licence	Sand, gravel and building stone only, 25 to 400 ha per licence	Common Minerals Law 12.2, 13.1, 14.3, 15.1.1	Cannot overlap a live exploration licence. Does not hold gold	Fallback for selected blocks
4. Further extension	Whole licence, 3 more years	Minerals Law 21.1.5	The 12-year limit appears to be reached	Closed, unless the licence record differs
5. Let it lapse and bid again	Whatever is won	Minerals Law 53.4, 17 to 20	Open competition, with no priority for NCGT	Last resort
6. Transfer or partial return	Nothing new	Minerals Law 21.1.4, 55	Does not stop the clock. Returned ground is barred to NCGT for 2 years (55.8)	Not a route

Why the extension looks closed

The law allows three 3-year extensions, so 12 years in total. The 2024 report form in the package gives a grant date of 29 May 2015 and calls 2024 the tenth year. The 2019 plan gives the same date, and the 2022 and 2023 covers count the same way. Twelve years from that date is 29 May 2027.

This means MRAM's advice looks correct, although the package's wording of "one extension" does not fit the arithmetic. It also leaves a date conflict: the README says March 2027, but we found no document that supports March, and the package has no certificate, expiry date or extension record. The difference is about three months, and the review would probably run past either date. The licence certificate will settle both points. We use March 2027 until then.

What filing before expiry does and does not do

Article 48.3 requires the reserve report, with an expert opinion, to be delivered before the licence expires. Article 48.4 then allows 30 days to appoint experts and 90 days for review.

The articles we read do not say what happens if that review runs past expiry. Article 24.1 gives the mining licence right to the exploration licence holder. MRAM should therefore confirm in writing whether a report filed on time protects NCGT's position during review. This is the most important open question in this reply.

Why the quarry route is only a fallback

- **It does not cover gold.** The holder may explore only for common minerals (15.1.1). Work must stop if another mineral is found (25.4).
- **Using it for gold is a cancellation ground.** Article 37.1.4 applies if other minerals are explored or mined under a quarry licence. Gold-bearing gravel should therefore not be proposed as quarry ground.
- **It covers little of the area.** The 400 ha cap is about 14% of the 2,793.91 ha licence, per licence.
- **Its timing is awkward.** An application overlapping a live exploration licence cannot be granted (14.3). Ground that NCGT returns early is barred to NCGT for 2 years (Minerals Law 55.8).
- **It is first come, first served.** Once the ground is open, the first valid applicant has priority (13.1). The aimag governor also takes soum and aimag assembly views (14.4).

One variation is worth asking MRAM about. Minerals Law 24.4.3 sets a 100 m minimum side for a common minerals mine area, yet Articles 3.1 and 3.3 leave common minerals to their own law. MRAM should say whether an aggregate reserve on XV-017716 itself can support a mining licence.

Where a quarry block could be. The candidates are in the north-east hard rock. RSC maps gabbro, diorite and granodiorite there, and Galaxy maps diorite, with different ages. This avoids conflict with the gold, but the package has no strength, grading or volume tests. The gravels host the gold and are clay-bearing: all 51 lithology intervals logged in 2026 mention clay. Basalt caps of about 1 m are too thin. The local water protection zone also needs checking.

Likely costs and timelines

Expect about ₮593M to ₮657M to reach a gold report filing on Phase 1 drilling alone. These are planning figures, not quotes. Drilling, survey, hydrogeology and test rates come from a comparable placer gold exploration budget in our files, and contractor quotes will replace them. Sampling, washing, panning and the reserve report are Great Vision's combined figure of ₮250M.

Route	Likely cost	Likely time	Status of the figures
1. Report on Phase 1 (46 holes)	₮593M to ₮657M	About 16 weeks to filing, then up to 120 days of review	Benchmark rates and our ₮250M combined figure; review period is statutory
1. Report on Phases 1 and 2 (82 holes)	₮878M to ₮1,003M	Cannot finish before March 2027 on our estimate	Benchmark rates and ₮250M combined figure; samples beyond Phase 1 at about ₮19,950 each
1. Report on all three phases (165 holes)	₮1,537M to ₮1,799M	Cannot finish before March 2027 on our estimate	Benchmark rates and ₮250M combined figure; samples beyond Phase 1 at about ₮19,950 each, upper limit if all infill is drilled
Add for a mining licence	About ₮15M environmental assessment and ₮65M feasibility study	Assessment before application (25.1.7); feasibility study within one year after grant (48.6.1)	Benchmark

Route	Likely cost	Likely time	Status of the figures
2. Pre-mining period	₹6.08M a year in fees on the full area	Up to 3 years after exploration expiry	Statutory (23.2, 23.4, 32.2)
3. Quarry, per block	About ₹57M to ₹60M for exploration, from a 149 ha andesite project	About 9 to 15 months from application to mining licence	Benchmark; time is our estimate
5. Lapse and bid	Unknown bid price	About 6 to 18 months, with no certainty	Our estimate

What the route 1 figures include

Item	Rate or amount	Phase 1
UKS drilling, 1,141 to 1,380 m	₹270,000 per metre	₹308M to ₹373M
Sampling, washing, panning and gold weighing, with the reserve report and expert process	Combined figure	₹250M
Survey	Lump sum	₹16M
Hydrogeology	Lump sum	₹10M
Technological test	Lump sum	₹8.7M

The figures exclude contingency, winter premiums, camp costs and NCGT's own staff. They also exclude archaeology, which can be large: the comparable budget carried ₹176M. The package refers to a 2022 National University archaeological rescue survey and to topographic surveys from 2016, 2021 and 2023, so costs may fall if these can be reused. Tightening hole spacing to 10 m would raise drilling cost. NCGT's actual 2026 contractor rate would be a better basis than our benchmark, so please send it.

Costs of holding the licence and a mining licence

Item	Rate	On 2,793.91 ha
Exploration licence fee, years 10 to 12 (32.2)	₹7,250 per ha a year	₹20.26M a year
Minimum exploration spend, years 10 to 12 (33.1.4)	US$10 per ha a year	US$27,939 a year
Mining licence fee (32.3)	₹21,750 per ha a year	₹60.77M a year, or ₹10.88M on 500 ha
Quarry royalty (Common Minerals Law 33.2)	2.5% of sales value	Depends on sales


The mine area must be a polygon aligned to latitude and longitude, with sides of at least 500 m (24.4.1). MRAM should confirm how much ground it will accept around a small reserve.

Route 1 working timeline

The dates below are our working plan, counted back from 1 March 2027 because the exact expiry day is not in the package. They depend on a rig starting in mid-November.

Filing by late February needs a rig on site by mid-November

Route 1 working plan, with expiry taken as 1 March 2027 and review at its statutory maximum

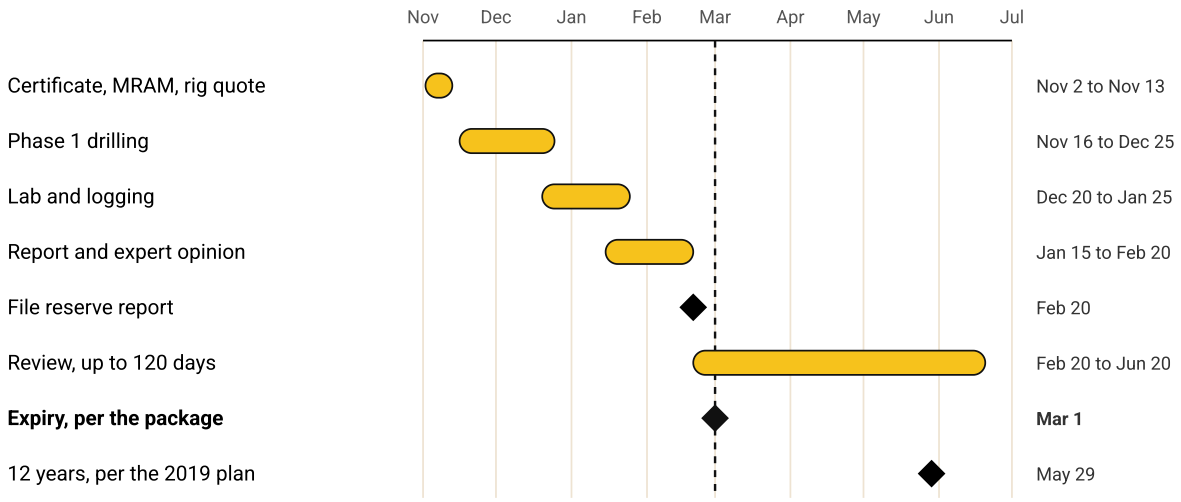

The review runs past the March expiry even if the report is filed on time. That is why MRAM's written position comes first.

Proposed 100 × 20 m drilling programme

The programme starts with 46 holes on the core lines, then adds holes only where gold justifies them. In the attached plan, lines run at azimuth 135° through GP-26020, 100 m apart, with a final hole spacing of 20 m. Seven 2026 holes already lie almost on one such line. That direction is not settled, as explained below.

Phase	Work	Block T	Block Z	Link H	Holes	Metres at 24.8 m	Metres at 30 m
1	Core lines, 40 m spacing	22	16	8	46	1,141	1,380
2	Outer lines, 40 m spacing	24	12	0	36	893	1,080
3	Infill to 20 m, where gold is found	51	24	8	83	2,058	2,490
Total		**97**	**52**	**16**	**165**	**4,092**	**4,950**

- **Block T** tests the gold around GP-26007, 26013, 26015, 26020 and 26022.
- **Block Z** tests the gold around GP-26012, 26018 and 26021.
- **Link H** tests the 480 m gap between them.
- **Depth:** stop 2 m into red-brown solid clay, or at 30 m. Gold reached 28.8 m in 2026 (GP-26018) and 67.5 m in 2025 (ZKA10-2), so 30 m has not closed the gold, and the package has no depth-to-bedrock estimate. A geologist should confirm this rule.
- **Sampling:** every hole, top to bottom, in continuous 0.4 m samples.
- **Boundary:** all holes stay at least 10 m inside XV-017716.

The 100 × 20 m grid only exists after Phase 3. It suits a first-stage C-level assessment of a placer wider than about 100 m. A narrower placer needs holes 5 to 10 m apart. RSC cites 10 m hole spacing on 100 m lines as an example acceptable to the Minerals Council, so 20 m may be too wide and costs higher. The final grid is the experts' decision, as Minister's Order 203 sets no numeric grid.

Phase 1 alone may not satisfy the experts, because it gives only 100 × 40 m on the core lines. We propose it because it is what the time allows. At the 2025 drilling rate it takes about 35 to 40 rig-days on one rig. That rate came from different drilling, so the contractor must confirm it.

The line direction is still open. We chose azimuth 135° to cross the north-east to south-west drainage and the terrain slope (azimuth 225°). But the best holes themselves line up along 135° (GP-26015 to GP-26021 at 134.8°, to GP-26012 at 135.2°). RSC maps the gold corridor north-west to south-east at about 143°, Monrock's faults run 129° to 147°, and Galaxy's alteration runs about 130°. If gold follows that corridor, our lines run along it, with the 100 m spacing across the gold and the 20 m along it, which is the wrong way round. Monrock's north-east magnetic ribs (about 046°) could be channels, but Galaxy reads them as dykes. We therefore propose drilling one or more test fences at azimuth 041° to 045° through the gold before the grid is fixed. A geologist should decide. Hole numbers would probably be similar if the grid rotates, but we have not redrawn the plan.

Hole coordinates are attached as Excel, CSV and DXF files, with an A3 plan at 1:5,000. They show the azimuth 135° layout and would be replaced if the direction changes.

Risks and information we need

The biggest risk is time: the report may be late, or filed on time and still under review at expiry. The line direction, the licence type and the hole position differences are covered in "What the rest of the package adds".

Risk	Effect	Response
Review runs past expiry	NCGT's right to apply may be challenged	Get MRAM's written position before committing funds
Winter conditions	The 2017 report records the Dötiin pass as very difficult in snow and cold. Frozen ground and sample washing may slow work	Contractor to confirm winter method and rate before award
Experts reject Phase 1 spacing	Report returned, with no time left to drill more	Ask an expert for an early view of the spacing and the block
Placer narrower than expected	20 m hole spacing is too wide	Review width after Phase 1, and tighten to 10 m
Sampling gap in 2026 data	Only 38 m of 620 m has results, so these holes may carry little weight	Confirm whether the unsampled intervals were tested
No bedrock logged	The base of the gold is unknown, and 16 of 25 holes end in gravel	Drill to the stop rule and log the base
GP-26001 position	About 4.5 m outside the west boundary on the supplied coordinates	Resurvey, and do not use it in the report until confirmed
Gold beside MV-020665	GP-26022 is 12.8 m from that boundary, with 117 mg/m³	Consider how the two areas relate before fixing the mine area
Third-party quarry applications after expiry	First valid applicant has priority	Prepare applications in advance as a fallback

What we need from NCGT

1. The licence certificate, with its grant date and every extension record.

2. MRAM's advice on extension, in the form it was given.
3. Receipts for licence fees and minimum exploration spend, for 2024 to 2026.
4. The annual plans and reports filed for 2024 to 2026, and the current environmental plan.
5. The 2026 contractor's rates, its final report, and whether a rig is available this month.
6. Whether the 2026 intervals without results were sampled, and what "-" means in the 2025 ZKA logs.
7. Any aggregate quality tests on the sand, gravel or hard rock.
8. Whether the neighbouring licence is 17117A, as on the 2019 plan map, or 17717A, as in the shapefile.
9. The older MRAM archive reports you offered, particularly any that define placer width.
10. Confirmation that no mining licence or registered deposit exists on XV-017716.
11. The results and costs of the 2022 MNNC and 2024 Zhengyuan work, with the complete 2024 settlement. Our copy lacks a page and states no currency.
12. The limits of the local water protection zone.
13. The original survey records for the 2025 holes.
14. RSC Annex 1 and section A–A1, and a corrected Galaxy report.

Next steps

The next two weeks decide whether route 1 is still possible.

1. **By 6 November:** NCGT sends the licence certificate and MRAM's advice.
2. **By 6 November:** NCGT and Great Vision put the written questions to MRAM: the expiry date, the licence type, the effect of filing before expiry, the pre-mining agreement, and aggregate on XV-017716.
3. **By 13 November:** NCGT obtains a rig quote and decides whether to start Phase 1.
4. **From 16 November:** Phase 1 drilling starts with the test fence, if the decision is yes.
5. **If the decision is no:** we prepare quarry applications for selected blocks, ready for the first working day after expiry.

What we have not verified

- **Law:** we read the current Minerals Law and Common Minerals Law on legalinfo.mn on 2 November 2026. This reply is not legal advice, and a Mongolian lawyer should confirm the route before funds are committed.
- **Pending amendments:** we have seen a 2026 draft amendment to the Minerals Law, of unknown status. It should be checked for changes affecting reports and environmental plans.
- **MRAM practice:** we have not spoken to MRAM. How it applies Articles 23, 24.4.3 and 48.4 is not confirmed.
- **Package coverage:** besides the drilling data and logs, we have now reviewed the magnetic surveys, the RSC mapping, the 54 photographs and the two CAD files. Limits: we read the CAD files with our own decoding script, not in CAD. Magnetic scans were partly viewed at reduced resolution, some photographed pages were read by caption only, and handwriting readings are tentative. RSC Annex 1 and section A–A1 are not in the package.
- **Site:** nobody from Great Vision has inspected the ground for this reply. Access, water and protected areas are unchecked.
- **Costs:** no contractor has quoted. All tugrik figures from past projects are benchmarks.

Appendix: every hole drilled

Au is the highest sample in the hole, in mg/m³. "Lowest gold" is the base of the deepest sample with a numeric gold value. "-" means no result. Coordinates are WGS84 UTM 47N and have not been checked on the ground.

Hole	X	Y	Depth, m	Samples	Au	Interval, m	Lowest gold, m
GP-26001	352877	5086944	30.0	1	13.3	0.0–0.4	0.4
GP-26002	353073	5086986	30.0	-	-		
GP-26003	353345	5086867	30.0	-	-		
GP-26004	353117	5087435	30.0	1	91.6	2.4–2.8	2.8
GP-26005	352967	5087465	30.0	1	0		
GP-26006	352903	5087665	12.8	-	-		
GP-26007	354590	5085553	30.0	5	235.1	1.6–2.0	3.2
GP-26008	352946	5087201	30.0	3	49.1	1.2–1.6	14.8
GP-26009	354245	5084947	30.0	-	-		
GP-26010	354444	5084763	30.0	8	16.6	27.6–28.0	28.0
GP-26011	354532	5084526	30.0	8	106.9	3.2–3.6	27.2
GP-26012	355086	5084992	30.0	6	144.1	9.6–10.0	28.4
GP-26013	354562	5085588	30.0	2	43.2	0.4–0.8	0.8
GP-26014	354695	5085811	30.0	6	53.8	2.8–3.2	4.8
GP-26015	354733	5085347	30.0	14	379.1	10.8–11.2	20.4
GP-26016	355345	5084409	30.0	5	28.6	20.4–20.8	20.8
GP-26017	355433	5084820	12.0	3	2.7	1.6–2.0	2.0
GP-26017a	355434	5084820	23.2	-	-		
GP-26018	355101	5084978	30.0	11	205.2	5.6–6.0	28.8
GP-26019	354604	5085535	8.0	1	0.7	0.4–0.8	0.8
GP-26020	354703	5085365	30.0	8	71.0	14.4–14.8	22.0
GP-26021	355074	5085009	30.0	4	45.8	11.6–12.0	28.4
GP-26022	354544	5085517	8.0	4	116.9	1.2–1.6	2.4
GP-26023	354553	5085501	6.0	-	-		
GP-26024	355945	5084169	10.0	4	0		
2026 total: 25			**620.0**	**95**			
ZKA10-2	353102	5087952	95.5	30	212.0	22.0–22.5	67.5
ZKA8-1	353117	5087723	76.0	2	4.0	3.0–3.5	46.0
ZKA6-1	353045	5087530	41.0	7	35.0	7.0–7.5	34.0
ZKA2-1	353052	5087090	59.0	11	23.0	9.5–10.0	48.5
ZKA0-1	353004	5086891	40.0	4	11.0	39.0–39.5	39.5
ZKA0-2	353117	5086843	56.0	8	6.0	18.0–18.5	34.5
ZKB2-1	354455	5086935	61.0	122	<10		
ZKB4-1	354619	5087056	61.0	122	<10		
ZKB6-1	354764	5087193	61.0	122	<10		
ZKB10-1	355062	5087454	61.0	122	<10		
ZKB12-1	355346	5087418	61.0	122	<10		
ZKB10-2	355216	5087268	61.0	122	40.0	53.0–53.5	54.0
ZKB8-1	355023	5087186	52.0	104	90.0	19.0–19.5	19.5
ZKB20-1	355082	5087714	61.0	122	<10		
ZKB22-1	355029	5087916	61.0	122	20.0	46.0–46.5	46.5
ZKB24-1	354937	5088115	50.0	100	78.0	12.0–12.5	12.5
ZKB26-1	354931	5088317	50.0	100	<10		
ZKB28-1	354966	5088517	40.0	80	<10		
ZKB14-1	355565	5087445	61.0	122	10.0	20.5–21.0	21.0
2025 total: 19			**1,108.5**	**1,544**			

Sources

- Minerals Law of Mongolia, legalinfo.mn, read 2 November 2026
- Law on Common Minerals, legalinfo.mn, as amended 3 July 2026
- Law on State Stamp Duty, legalinfo.mn, Article 35.6
- NCGT package, October 2026: `00 READ ME FIRST`, folders 01, 03, 06 and 08
- `017716 exploration work report 2017.pdf`, introduction: first grant in 2015
- `017716 exploration work plan 2019.pdf`, page 2: grant date 29 May 2015
- NCGT package: 54 photographs (IMG_5984 for the grant date; IMG_5965 to 5966 and 5985 to 5986 for earlier work), `2025_fact.dwg`, and the RSC, Monrock and Galaxy reports
- Minister of Mining's Order 203 of 2015: classification and instructions for mineral resources and reserves, clauses 3.2.3 and 3.3.1
- Great Vision project files: cost benchmarks from past exploration budgets, client details withheld